

C-Series Padlock

Professional High Security



Application

High Security padlock for general use.

Operation

Rotate key 55° - 65° to unlock.

Options

- Removable shackle with non-retaining key
- Pop-open shackle with retaining key (key needed for closing)
- Variety of shackle clearances
- Black or nickel finish
- C-13 model available with one-piece stainless steel shell and shackle protector
- Added Mul-T-Lock hasp
- Added shackle protector

Materials

Shell: hardened steel

Core: black plated solid brass

Shackle: hardened boron alloy steel.

Additional features

- Protective shutter prevents dust contamination.
- Drainage holes prevent freezing.

Cylinder mechanism

Mul-T-Lock's unique high precision pin tumbler system. Pick and drill resistant for High Security needs.

Keys


Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder Options

- Classic, Interactive®, MT5® platforms
- Keyed different, keyed alike
- Master keyed
- '3 IN 1' (changeable combination)

Standards

CEN, ISI technical specification 21

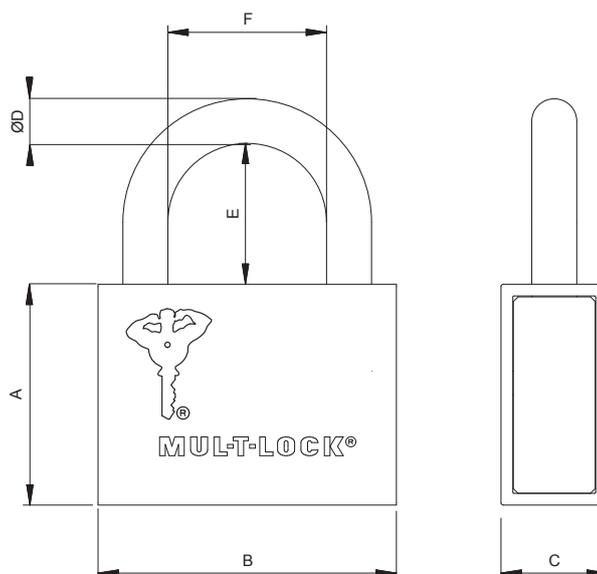

Model	Body				Shackle						Standard grades	Suitable hasp#
	A	B	C	D	E				F	CEN		
					E	E1	E2	E3				
*C-6	mm	47	50	22	6	--	22	50	102	24	--	--
	Inch	1.85	1.97	0.86	0.23	--	0.86	1.97	4.1	0.94	--	--
*C-8	mm	47	50	22	7.9	--	22	50	102	22	2	--
	Inch	1.85	1.97	0.86	0.31	--	0.86	1.97	4.1	0.86	2	--
C-10	mm	47	63	22	9.5	--	30	63	102	33	3	10
	Inch	1.85	2.5	0.86	0.37	--	1.2	2.5	4.1	1.29	3	10
C-13	mm	51	73	25	12.7	25	37	58	102	33	4	13
	Inch	2	2.87	0.98	0.5	0.98	1.46	2.28	4.1	1.29	4	13
C-16	mm	53	92	32	15.8	--	50	63	102	38	5	16
	Inch	2.1	3.6	1.26	0.62	--	1.97	2.5	4.1	1.5	5	16

Note: Adding a hasp considerably upgrades the level of security.

*Can not be supplied as removable shackle

